


STOPCOCK

GENERAL INFORMATION

- Ideal for liquids and gases under low pressure (operating pressure 0,5 bar) or low vacuum.
- HDPE body interfaces with Polypropylene tag giving a smooth turning action requiring no lubricants.
- All stopcocks have the rectilinear passage hole.

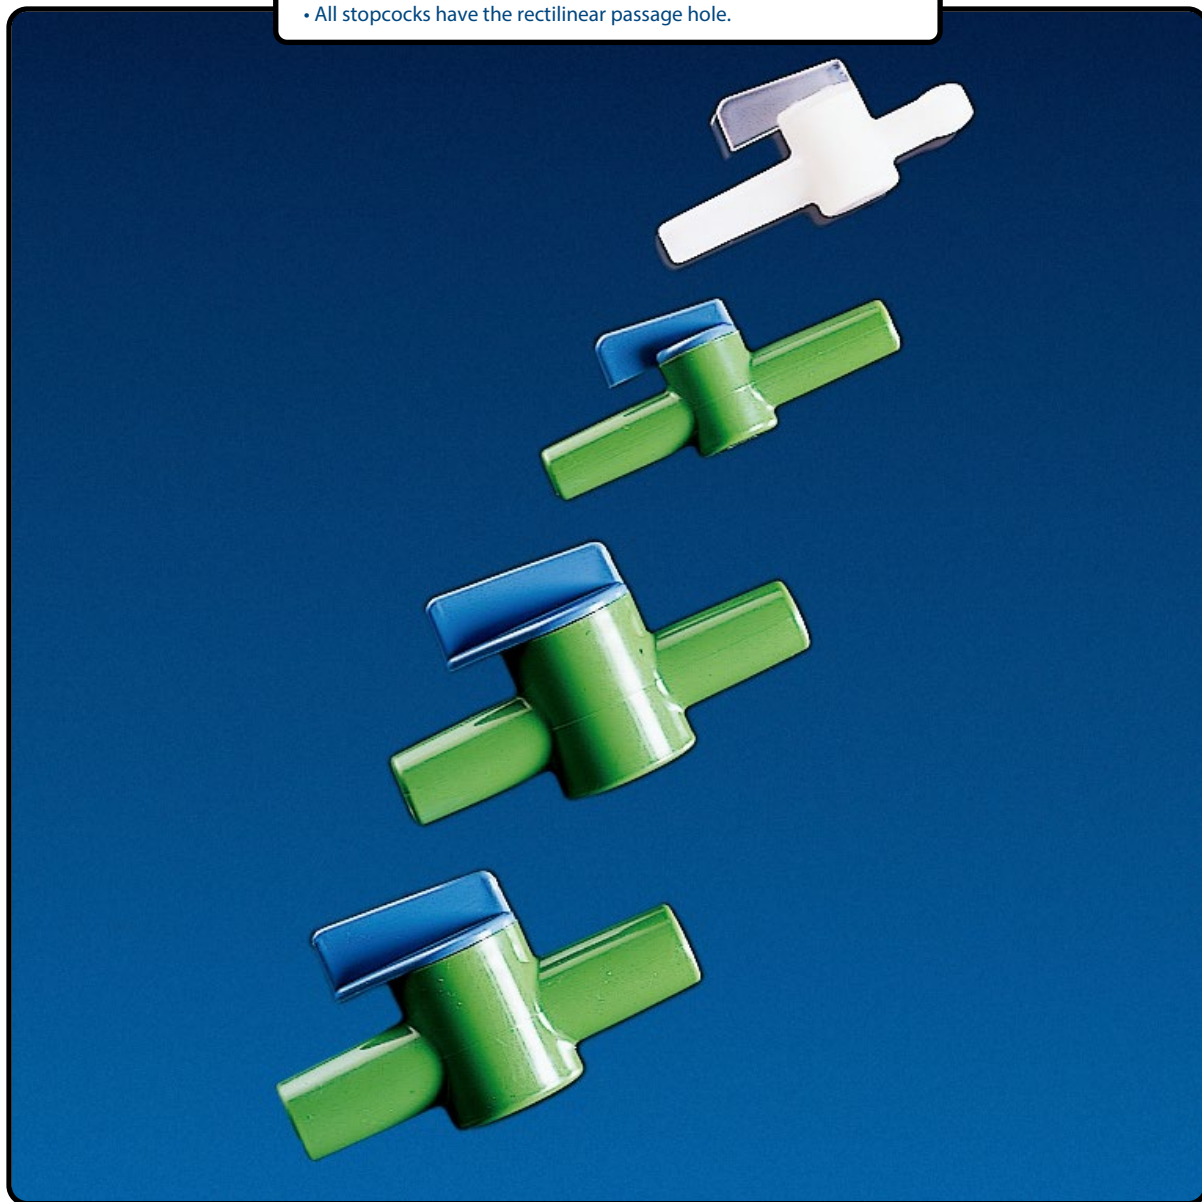

TECHNICAL SPECIFICATIONS

Reference	External diameter (mm)	Internal diameter (mm)	Uds./bag	Uds./box
K-374	8	4,9	10	2000
K-371	10	7	10	1500
K-376	14	10,9	10	800
K-379	16	12,7	10	800